


TABLEAU DES FINIS	
FRAME FINISH:	ST/STL #4
DOOR FINISH:	ST/STL #4
SILL TYPE / MATERIAL:	EXTRUDED / ALUMINUM
SILL SUPPORT FINISH:	SATINCOAT
FASCIA FINISH:	SATINCOAT
PIT FASCIA & DUST COVER FINISH:	SATINCOAT
ACCESSOIRES	
CONSTRUCTION TYPE:	BOLTED
SOUND DEADENING:	NOT PROVIDED
JAMB PLATE:	PROVIDED
ELEV. / FLOOR:	ALL FLOORS
STYLE:	RJ4 - 4" X 4" STICK ON - COMPANY: SCS
FINISH:	PLASTIC - WHITE ON BLACK BACKGROUND
STAR OF LIFE:	NOT PROVIDED
ELEV. / FLOOR:	---
JOB APPLICATION:	
ENTRANCE TYPE:	VICTORY ENTRANCES
FIRE RATED:	ULC 1 1/2 HR (CANADA) / ULI 1 1/2 HR (OTHER COUNTRY)
INTERLOCK KIT:	VICTORY
ELEVATOR USE:	LIMITED-USE / LIMITED-APPLICATION
SPEED & CAPACITY:	
TOTAL ENTRANCE QTY:	
TOTAL ELEVATOR QTY:	
FLOOR(S) SERVED:	

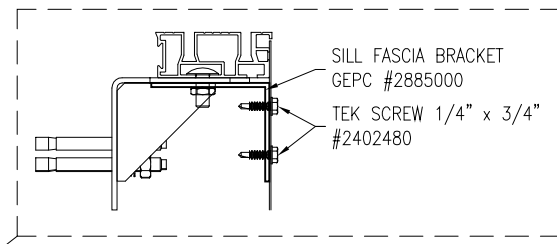

★
SOLID MASONRY GROUTING BY GENERAL CONTRACTOR TO BE POURED ONCE THE FRAME HAS BEEN SET IN PLACE AND ON THE BOTTOM OF THIS ONE, AND/OR NOTCH THE BLOCK IF NECESSARY. ALL THIS TO COMPLY WITH UNDERWRITERS LABORATORIES.

★★
ENTRANCE FRAMES ARE NOT DESIGNED TO SUPPORT OVERHEAD WALL LOADS. OWNERS MUST PROVIDE SUITABLE MEANS TO SUPPORT THESE LOADS.

NOTE A:
GLOBAL TARDIF ENTRANCE CONSTRUCTION COMPLIES WITH ALL REQUIREMENTS AS SET FORTH IN THE LATEST APPLICABLE ELEVATOR SAFETY CODE. WHEN THIS DRAWING WAS INITIALLY PREPARED, COMPLIANCE WITH ALL LOCAL STATE AND OTHER JURISDICTIONAL CODE INTERPRETATIONS AND ALL ADDITIONAL FEDERAL REQUIREMENTS IS THE TOTAL RESPONSIBILITY OF OUR CUSTOMERS.

IMPORTANT

NOTE B:
ALWAYS PUT AN ADDITIONAL PROTECTION AGAINST FIRE WHEN YOU HAVE INSERTIONS OF FIXTURES WITHIN THE FRAMEWORK IN ORDER TO MAINTAIN THE INTEGRITY OF THE HOISTWAY WALL.

REV.:	DATE:	DESCRIPTION:	BY:
DRAWING NAME: LANDING ENTRANCE			
ELEVATOR(S) NUMBER:			
DETAILS: BLOCK 7 1/2" [191] FRAME 2" [51] TWO SPEED			
PROJECT NAME:			
LOCATION:			
DRAWN BY: K.R.		VERIFIED BY:	DATE:
REF.: VIC-E10-EN		DRAWING #:	SCALE: N.T.S.
SHEET: 1/1		REV:	

