

FRONT & REAR OPENING


Capacity lbs. (kg)	Pit Depth <sup>3,4</sup>	Overhead (OH <sup>3</sup> )	Cab height
8000 (4500)	4'-6" (1370)	15'-0" (4570)	8'-0" (2440)
15000 (6800)	5'-6" (1675)	17'-0" (5180)	10'-0" (3050)

- ① Regular Bi-Parting Door.
- ② For extended sill or pass type, add 1.75" (44.5 mm) to Hoistway Depth for each door.
- ③ Columns are to be extended from pit bottom to overhead beam supports. Where adequate brick or concrete walls are used, columns supports are not required. It is an understatement that sizes of structural columns and framing members are approximate. Accurate data will have to be provided by owner when exact loads, car sizes, floor heights etc., are available. All structural columns, ties connections are to be provided and erected by owner.
- ④ For higher speed, contact us.

### Hydraulic "Holed" Freight Elevator CLASS B - Front & Rear Opening - Model B

Speed fpm (m/s) <sup>4</sup>	Capacity lbs. (kg)	Hoistway Width	Hoistway Depth	Platform Width	Platform Depth	Size of Opening
		HW	HD <sup>2</sup>	PW	PD	
25 to 100 (0.18 to 0.5)	8000	146"	251"	124"	240"	120"
	4500	3710	6375	3150	6100	3050
25 to 75 (0.18 to 0.38)	15000	184"	311"	148"	300"	144"
	6800	4675	7900	3760	7620	3660

Groupe manufacturier d'ascenseurs

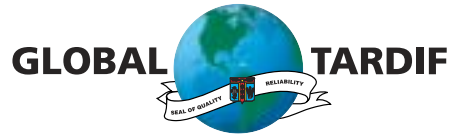

Elevator Manufacturing Group