

FRONT & REAR OPENING


Capacity lbs. (kg)	Pit Depth	Overhead (OH ⁵)	Cab Height
8000 (4500)	5'-0" (1525)	15'-0" (4570)	8'-0" (2440)
15000 (6800)	5'-6" (1675)	17'-0" (5180)	10'-0" (3050)

- ① Regular Bi-Parting Door.
- ② For Extended Sill or Pass Type, add 1,75" [44,5] to "HD" or "HDR" for each door.
- ③ Columns are to be extended from pit bottom to overhead beam supports. Where adequate brick or concrete walls are used, columns supports are not required. It is an understatement that sizes of structural columns and framing members are approximate. Accurate data will have to be provided by owner when exact loads, car sizes, floor heights etc., are available. All structural columns, ties connections are to be provided and erected by owner.
- ④ For higher speed, contact us.
- ⑤ For speed higher than 100 fpm [0,51] , you must add to the overhead:
 Elevator speed 100 FPM [0,51] and under, 0 inch to the overhead
 Elevator speed Between 101 FPM [0,52] to 125 FPM [0,64], 2 inches to the overhead
 Elevator speed Between 126 FPM [0,64] to 150 FPM [0,75], 4 inches to the overhead
 Elevator speed over 150 FPM [0,75], contact us
- ⑥ For maximum travel contact us

Hydraulic "Twin Jack Roped" Freight Elevator
 CLASS B - Front & Rear Opening - Model B

Speed fpm (m/s) ⁴	Capacity lbs. (kg)	Hoistway Width	Hoistway Depth	Platform Width	Platform Depth	Size of Opening
		HW	HD ²	PW	PD	
25 to 100 (0.18 to 0.5)	8000	152	251	124	240	120
	2250	3860	6375	3150	6100	3050
25 to 75 (0.18 to 0.38)	15000	181.5	311	148	300	144
	6800	4610	7900	3760	7620	3660

Groupe manufacturier d'ascenseurs

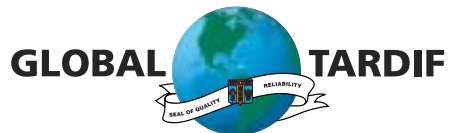

Elevator Manufacturing Group