GT SmartLift SDR & HR Safe & Efficient!

Strong

Vertical Platform Lift



Since 1984, Global-Tardif has earned a top reputation as a manufacturer of field proven, innovative products for the elevator industry. The company has grown to become one of the largest independent manufacturers of elevators in North America.

The GLOBAL-TARDIF Elevator Manufacturing Group Inc. introduces one of its best accessibility lift designs for private or public buildings. This lift has been designed for people with physical disabilities. The GT SmartLift SDR & HR™ meets or exceeds all applicable codes in Canada or U.S.A. And is very user friendly, reliable and dependable.

- Screw Drive Or Hydraulic Roped System
- Best Solution for Split Level Access
- Ideal Choice for Main Lobby
- Semi Enclosed Commercial Lift
- Self-Supporting
- No Machine Room
- Aesthetic Pleasing
- Smooth & Quiet Operation
- Efficient
- Sturdy Construction
- Low Maintenance
- Customizable
- CSA Approved components
- Visit Our Website at:



since 1984



Manufacturing

GT SmartLift SDR & HR™



Standard Features

Common Features

- 750 lbs (340 kg) Capacity
- Weather & Corrosion Proof Zinc Plated Free Standing Tower
- Minimum Required Overhead of 78 3/4" (2000 mm)
- Minimum Pit Depth of 3" (75 mm)
- Car Enclosure Height of 42 1/4" (1070 mm)
- Constant Pressure Operation
- Emergency Stop Switch with Alarm
- Keyed ON / OFF Switch in Car Control Panel
- Automatic Emergency Lighting
- Pre-wired Tower Equipment
- Non-skid Platform
- Stainless Steel Tubular Handrail
- Maintenance Free Sliding Guide Shoes
- Pit Stop Switch
- Power Supply 110 VAC
- Battery Emergency Lowering in case of 110 VAC failure
- Battery Operated 24 VDC Up/Down Operation with Power Pack Converter 110 VAC to 24 VDC with Battery

GT **SmartLift SDR**[™] Features

- Screw Drive System
- 0.4 HP Heavy Duty Motor
- Travel Speed of 4 feet per minute (0,02 m/sec)
- Up to 10'-0" (3048 mm) of Travel

GT **SmartLift HR**[™] Features


- Quiet 2:1 Hydraulic Roped Drive System
- 3/4 HP Heavy Duty Motor
- Travel Speed of 15 feet per minute (0,08 m/sec)
- Up to 23'-0" (7000 mm) of Travel
- Emergency Manual Lowering Valve
- Easy Relay Logic Control GT-SML™
- Slack/Broken Cable Safety Device
- Two Way Levelling
- Downspeed Flow Control Valve
- Low Pressure Switch
- Negative Pressure Switch


Your Authorized Dealer is:

Options

- Fire rated 1h30 ULC Entrances with Flush Landing Doors
- Automatic Door Operator
- Enclosure Clear Anodized Aluminium, Painted Steel, Plexiglass, Lexan or Glass to Suit your Needs
- Self Supporting Unit
- Keyed Call & Send Landing Control Station
- Upper Landing Swing Gate with PrudHomme Lock
- Platform Depth of 60" (1524 mm)
- Custom Platform Size Available
- Any Opening Configuration Available
- Any Custom Finishes or Design Available

...and for more Name It, We Will Do It!

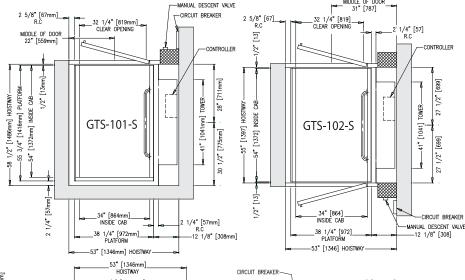

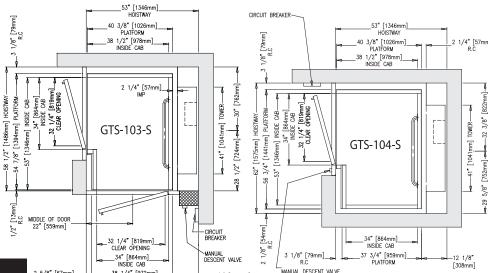

For more information and detailed drawings visit our web site at

www.gtaccessibility.com







*The GLOBAL-TARDIF Limited Warranty covers replacement of any defective parts for a period of one (1) years. Labour cost not included.
GLOBAL-TARDIF reserves the rights to discontinue models or options at any time or change the specifications, materials, equipment or pricing without notice and without incurring obligation.
U.S. and foreign patents pending. 2004 GLOBAL-TARDIF Elevator Manufacturing Group Inc.