



GLOBAL TARDIF

 Elevator Manufacturing Group

 120 rue de Naples, St Augustin de Desmaures, Qc, Canada, G3A 2Y2

 P. 418.878.4116 F. 418.878.1595 Email : info@globaltardif.com

Vertical Platform Lift
(Inside application)
GT SmartLift™
 Meets B355-M00 , B613M00, ASME A18.1

REQUEST FOR PRICING
(RFP)
GT Accessibility
 Update: 2007-02-07

Date : _____ Number of unit: _____ Estimate #:
 To be completed by Global Tardif

Company Name : _____ Job Name : _____

Contact name: _____ Location : _____
 City, Province/State, Country

NOTE: All completed RFP's can be either faxed to 418.878.1595 or emailed to sales@globaltardif.com

General Information: Please visit our web at www.globaltardif.com for additional information

Machine location : Inside the tower Remote : _____ Applicable Code : _____
 Qty of elevators : _____ Public application Residential application
 Capacity : **750 LBS** Main line Voltage : _____ 120 / 1 / 60
 Speed : _____

Number of Stops :
 Front Openings :
 Rear Openings :
 Side Openings :
 Total Travel : Inches
 Pit Depth : 3" Standard
 Overhead :

Floor designation:
 Floor designation:
 Floor designation:
 Inside cab dimension (w x d) : x Inches
 Hoistway size : x Inches

Base Unit Selection

No enclosure
 Enclosure by G.C
 Enclosure by Global Tardif

If enclosure supplied by Global Tardif

Enclosed Steel insert
 Enclosed Plexi-Glass insert
 Enclosed Glass insert
 Additional Enclosure Height Above top landing 90 1/4"
 Additional Enclosure Roof Include additional Enclosure height

SCREW
 SmartLift "S - SDR" - Travel up to 120" Speed: 4 FPM

or
 HYDRAULIC
 SmartLift "S" - HR - Travel up to 264" Speed: 15 FPM


Hydraulic oil ** (1 x 5 gal or 20 lt) Hydraulic series only
*** GT will not ship to Canada or US any hydraulic oil - Only pick up at the plant*

Landing Door & Gate

If no enclosure

Public " S " package - Anti-crushing under panel sensor, auto fold-up ramp, pit switch, alarm

If enclosure supplied by General Contractor (G.C.) or Global Tardif

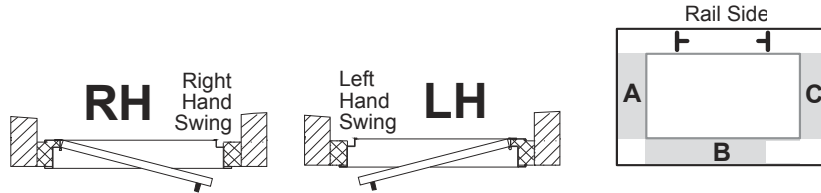

	Level 1	Level 2	Level 3	Level 4
RH Swing or LH Swing				
Door Location A, or C				

GT-Swing Door *** All GT Swing Doors are made with Besa Nato White Aluminum tubing

- GT-Swing Door - UL/ULC 1 1/2 hr Zinc coated w/ vision glass, closers , Prud'Homme lock - 36" (914 x 80"(2032mm)
- GT-Swing Door *** Alu. Frame Plexiglass insert Closer Prud'homme lock 34" (864mm) x 80"(2032mm)
- GT-Swing Door *** Alu. Frame Lexan insert Closer Prud'homme lock 34" (864mm) x 80"(2032mm)
- GT-Swing Door *** Alu. Frame Laminated glass Closer Prud'homme lock 34" (864mm)
- " Clear anodized Aluminum " GT Swing Door framing
- Custom Swing Door closers , Prud'Homme lock - 36" (914 mm) x 80" (2032 mm)

GT-Swing Gate *** All GT Swing Gates are made with Besa Nato White Aluminum tubing x 42 1/4" (1073mm)

- GT-Swing Gate *** Alu. Frame Aluminum insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate *** Alu. Frame Plexiglass insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate *** Alu. Frame Lexan insert Closer Prud'homme lock 34" (864mm) x 42 1/4" (1073mm)
- GT-Swing Gate *** Alu. Frame Laminated Glass Closer Prud'homme lock 34" (864mm)
- " Clear anodized Aluminum " GT Swing gate framing
- Custom Swing Gate closers , Prud'Homme lock - 36" (914 mm) x 80" (2032 mm)

- Custom paint color GT-Swing Door or GT-Swing Gate
- Brass kickplate and push plate (instead of stainless)
- Aluminum checker plate sill

Automatic door operator - On surface for full size doors

- Locks Only - GAL door interlock
- Locks **Only** - Prudhomme s.a door interlock

Platform Dimension and options

- Standard platform size at 34" width x 54" depth
- Standard platform size at 34" width x 60" depth
- Cab size 34" width x 48" depth platform - Cannot be used with folding ramp
- Front opening only - Enter / Exit same side Standard size
- Custom platform 90 degree - front & side exit

- Custom platform size up to 15 square feet
Confirm Inside cab. Dimension: W: inches D: inches

- Platform folding seat
- Rubberized flooring - Diamond Plate Mat Black

Car Cab options

- Standard Cab wall - GT Selection Choice of Two (2) colour of melamine inserts
 - Additional Stainless steel tubular handrail Commercial model
 - Platform gate, lock and spring door closer
 - Phone cabinet (phone & line by others)
 - Hands-free phone on platform (phone line by others)
 - CUSTOM Cab
- Specify:

FIXTURES options

- Keyless Call Station only
 - Keyless Call & Send Station
 - Keyed Call Station only
 - Keyed Call & Send Station
 - Call & In Use Hall station Econo Mueller
 - Call station Luxury US91
 - Keyed call station Econo Mueller
 - Key lock out hall call & In Use station Econo Mueller
 - Key lock out hall call & In Use station Luxury US91
 - Additional Key switch or Floor lock out key switch in Hall or Car panel
-
- Upgrade Luxury line Car Operating panel US91 stainless steel
 - Brass car control station plate
 - Digital PI Dot Matrix 2" Character
 - Multi-Lights PI, max 6 stops US91

GENERAL

- To paint the entire SmartLift Unit - Besa Nato white
- To paint the entire SmartLift Unit - Optional Color
- Touch Up paint - Spay can
- Fixed inclined access ramp to platform - for interior or enclosed lift (12 : 1)
- Custom Fixed inclined access ramp to platform - for interior or enclosed lift Specify Slope: ____ : 1
- Galvanized steel fascia per 12"
- Stainless steel fascia per 12"

Clarifications, Comments or Alternate
