### The Right Choice for LU/LA

## Commercial LU/LA or Residential Elevator



Global Tardif is proud to present the **GT 500**<sup>™</sup> product series. In this series of accessibility products, the elevators are often mistaken as full sized passenger elevators.

The **GT-500 LU/LA**™ models are a fully enclosed sliding door "commercial" elevators. The **GT-500R**™ is a fully enclosed sliding door "residential" type elevator.

All **GT500**<sup>™</sup> units are user-friendly and cost-effective solutions for new construction or when adding an elevator to an existing structure. Easily to install, reliable, quiet, and smooth operation make the **GT 500**<sup>™</sup> your best solution for low multi-levels applications.

At Global Tardif, our focus is on quality assurance. Our top priority is always customer satisfaction. When choosing the **GT 500**™, you can feel confident you are selecting the best accessibility elevator in the market.

- Passenger Elevator Look-Alike
- Quiet & Smooth Operation
- Outstanding Cab Design
- Stainless Steel Cab Front
- Stainless Steel Modular Cab Shell
- · Removable Plastic Laminate Hang-On Panels
- Passenger Type Sliding Doors
- Heavy Duty Roped Hydraulic System
- Microprocessor Controller GTS -PLC500™
- CSA Approved Components
- Visit Our Website at :



since 1984



Elevator Manufacturing Grou

# GT **500**<sup>™</sup>

#### Silver 1-Year Warranty\*

Front & Side Openings // Cab inside: 42"x 60" // Front Openings // Cab inside: 48"x 54" // Front & Rear Openings // Cab inside: 48"x 54"

GT-503 // F GT-501W // GT-502W //

#### Standard Features

• Capacity: 750 lbs for the **GT-500R** Residential Elevator

1400 lbs for the GT-500 LU/LA Commercial Elevator

• Cab Height: 7'-0" (2134 mm)

• 1:2 Cable Hydraulic Drive System

• Speed: 30 fpm (0.15 m/sec)

• Max Travel: **GT 500R**: 50'-0" (15 240 mm)

GT 500 LU/LA: 25'-0" (7620 mm)

• Overhead\*\*: **GT 500R**: 110" (2794 mm) for the GT 500

**GT 500 LU/LA**: 110" (2794 mm) - Existing Building

GT 500 LU/LA: 132" (3353 mm) - New Building

• Pit Depth: 15" (381 mm)

• 4 HP Motor

• Submersible motor with submersible pump units GT500SB-Power TM

• Manual lowering Valve located at the pump

· Low pressure switch

• Building Voltage: 220V / 1 ph / 60 Hz

• **GT-PLC500**<sup>™</sup> Controller

• Two-Speed Door Operator

• Car top inspection Station (for GT 500 LU/LA only)

• Single Collectif operation

• GTS-1000 Tape reader levelling system

• Emergency alarm and stop button

Emergency cab lighting

\*\* These dimensions are based on standards of the company. May vary according to the dimensions of your project and depending on selected options.

#### Standard Cab Features

- Stainless steel #4 Cab front and doors
- Stainless steel #4 modular cab shell wall reveaks and bases
- Plastic laminate panels
- Custom color selection as per our standard GT chart of Wilsonart
- Stainless steel #4 handrail
- Stainless steel #4 control panel with braille tactile plate
- LED illuminated car direction and position indicators (for GT 500 LU/LA)
- Phone cabinet (standard for GT 500R)
- Hands free phone (standard for GT 500 LU/LA)


#### **Landing Entrances Features**

- 1 ½ hr UL/ULC fire rated entrances assembly
- Bolted frame Three pieces knock down
- Square profile design
- Stainless steel #4 finish
- Aluminum sills
- Braille jamb plate stick-on type (for GT 500 LU/LA)

Your Authorized Dealer is:

#### **Options**

- Optional speed
- Reduced pit
- Direct acting
- Building voltage of 575 / 480 / 208V 3 ph
- Emergency Power Pack UPS
- Digital position indicator
- Cab inside 4'-0" x 4'-6" (1219 mm x 1372 mm)
- Custom size, Design and finish
- Custom cab height
- · Glass cab & Glass doors
- Pad hooks for protective pads
- Protective pads
- Fan 1 speed
- Hands free phone (for GT 500R)

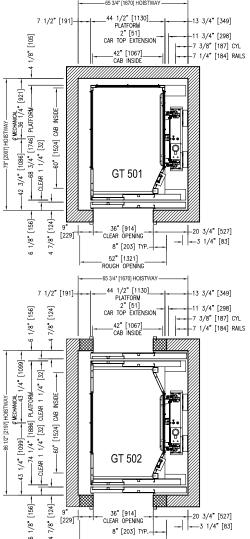

For more information and detailed drawings

visit our web site at

www.gtaccessibility.com







\*The GLOBAL-TARDIF Limited Warranty covers replacement of any defective parts for a period of one (1) year. Labour cost not included.

GLOBAL-TARDIF reserves the rights to discontinue models or options at any time or change the specifications, materials, equipment or pricing without notice and without incurring obligation

U.S. and foreign patents pending. 2004 GLOBAL-TARDIF Elevator Manufacturing Group Inc.